



The only thing "mini" about this tag is its size! With a smaller footprint and lower profile, the Universal Mini RFID Tag easily fits where other tags may be too large and obtrusive and still gives incredible read range compared to other tags in its class - now with the benefits of onsite printing.


**Material and Design Specifications**

- Overall dimensions 2.75" x 0.75" x 0.045" (69.85 x 19.05 x 1.14 mm)
- 0.002" (0.051 mm) pressure-sensitive acrylic adhesive
- Inlay wrapped around 0.0313" (0.80 mm) closed cell foam, total thickness 0.047" (1.19 mm)
- Onsite printable material

**Technical Specifications**

- **RF protocol** EPC global Class 1 Gen 2
- **Frequency** 860-960 MHz (Global)
- **IC type:** Various
- **Chip memory:** Various
- **Read range on metal** Up to 15 ft. (4.6 m)
- **Polarization** Linear

**Radiation Pattern**

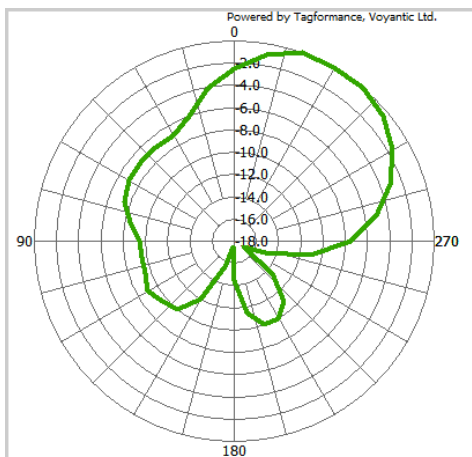

**Onsite Printable Universal Mini RFID Tag**

UNIVERSAL PRODUCT LINE

**Key Features**

- Up to 15 ft. (4.6 m) read range on metal surfaces
- Patented inlay design obtains excellent read range regardless of surface - metal, plastic or even wood
- Designed for easy setup of printing and RFID encoding
- Thermal transfer printer receptive
- Available for next-day delivery

**Applications**

- Asset Tracking
- Inventory Management
- IT Asset Tracking
- Tool Tracking
- Work-in-Progress
- Warehouse

**Printer Recommendations**

- Printronix T6000e
- SATO CL4NX Plus
- Zebra ZT411r

**Ribbon Recommendations**

- Wax/Resin DNP TRX-50
- Wax/Resin IMP General Purpose
- Resin DNP V300
- Resin TR4070

**Environmental Specifications**

- Minimum Application Temperature 50° F (10° C)
- Temperature Range: -40° F to +175° F (-40 to 79.4° C)
- UV Resistance: Indoor/outdoor use
- Chemical Resistance: Can withstand moderate cleaning chemicals and brief exposure to solvents
- Minimum bend radius: 3" or 76.2 mm (when wrapped horizontally around a curved surface)



## Test Results

These tests were conducted for a limited period in strict laboratory conditions. To achieve maximum satisfaction, we highly recommend any customer considering use of this product test the labels in the environment in which they will be used.

**Chemical Soak Test: NE = This rating measures barcode readability on various labels after being exposed to chemicals listed below for a 6-hour soak.**

Product	Water	Glass Cleaner	Bathroom Cleaner	Alcohol	Acetone	Sodium Hydroxide	Nitric Acid	Hydrochloric Acid	Brake Fluid	Diesel
Onsite Printable Universal Mini RFID Tag	NE	NE	NE	NE	NR	NE	NE	NE	NE	NE

Key: NE = No Effect, NR = Not Recommended

### Heat Test

Onsite Printable Universal Mini RFID Tag

200° F (93.3° C)

## Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc. debris that may affect adhesion.
2. Handle the tag by edges, peel release liner from back ensuring not to touch the adhesive.
3. Place the tag in desired tagging location and firmly apply even pressure to the tag for 5 seconds.
4. Do not disturb the newly mounted tag for at least 72 hours to ensure proper adhesive sealing.

## Industry Compliance

